KODAK MAX Alkaline Battery K3A

Effective: 22/05/2014



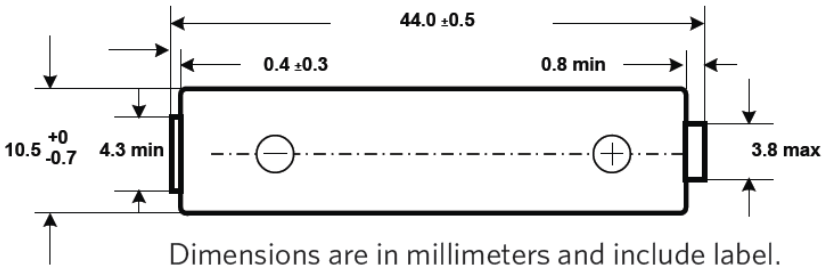

Dimensions are in millimeters and include label.

Chemical system:	Alkaline, MnO_2 / KOH / Zn
Designations:	IEC LR03, ANSI 24A
Nominal Voltage:	1.5V
Nominal Capacity:	1150 mAh at 75 Ohms to 0.8 Volts
Internal Impedance:	0.18 Ohms (typically)
Average Weight:	12.0 g
Average Volume:	3.8 cm^3
Recommended storage temperature:	10 – 25 °C
Operating temperatures:	-20 – 54 °C
Reaction:	$2\ MnO_2 + Zn + H_2O \rightarrow 2\ MnOOH + ZnO$
Terminals:	Flat contacts, protruding negative
Jacket:	Plastic label

Note:
1) No added Mercury / 99.9999% Mercury Free
2) No added Lead /99.999% Lead Free
3) No added Cadmium / 99.9999% Cadmium Free
4) No added PFOS (Perfluorooctane sulfonates)
5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
6) Batteries are NOT subject to European RoHS regulations.
7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
8) MSDS sheets are available on request from Strand Europe Ltd.

Kodak Licensed Product

The Kodak trademark and the Kodak trade dress are used under license from Kodak.
© 2013 STRAND EUROPE LTD
www.kodakbatteries.strandeurope.com